

For protecting the user's respiratory tract against the harmful impact of air pollution in the form of solid and/or liquid particles forming aerosol (dust, fumes, mists) up to  $4 \times TLV$ .

## **Application**

Non-toxic dust, agricultural industry, food industry, quarry, cement plants; especially for dusts such as calcium carbonate, natural and synthetic graphite, gypsum, chalk, cement, plaster, marble, zinc oxide, pollen, cellulose, sulphur, cotton, ferrous metal filings, coal dust containing less than 10% of free silica.

## **Specification**

Half mask face-piece:


- Needle-punched nonwoven polyester
- Melt-blown nonwoven polypropylene
- Protective nonwoven

Additional elements:

- Exhalation valve
- Nosepiece for better facial fit within the nose area
- Polyethylene foam nose seal
- Head band pins for length adjustment
- Head band

ata sheet



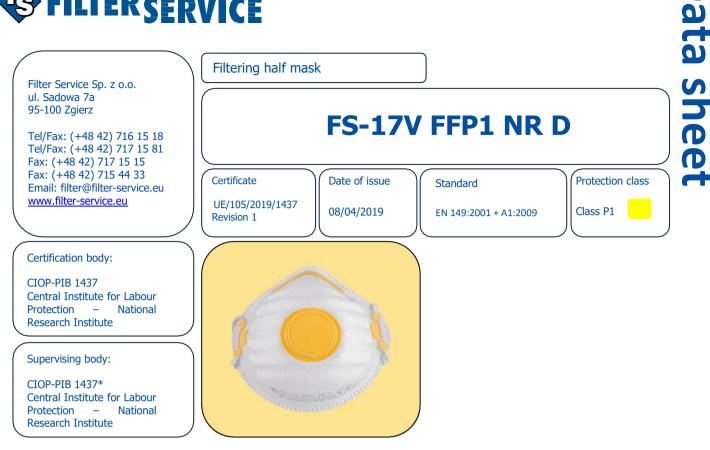

## **Requirements**

The half mask meets the latest requirements:

Regulation (EU) 2016/425 of the European Parliament and of the Council of 9 March 2016 on personal protective equipment and repealing Council Directive 89/686/EEC.

## **Contraindications**

The half mask must not be used under low-oxygen conditions (below 17%), which means that it is forbidden to use it in confined spaces, such as canals, manhole shafts, tanks. Also, the half mask does not protect against vapours and gases that are harmful for health and pose a life hazard. Do not use while extinguishing fire. The half mask does not supply oxygen. The half mask will not provide adequate facial fit for people with unshaved or bearded face. The half mask does not protect against aerosols containing radioactive and carcinogenic particles, microorganisms (bacteria, viruses, fungi and their derivatives) or enzymes.

Primary packaging: 50 pcs per plastic bag Collective packaging: 500 pcs per carton