

Filter Service Sp. z o.o.
ul. Sadowa 7a
95-100 Zgierz

Tel/Fax: (+48 42) 716 15 18
Tel/Fax: (+48 42) 717 15 81
Fax: (+48 42) 717 15 15
Fax: (+48 42) 715 44 33
Email: filter@filter-service.eu
www.filter-service.eu

Filtering half mask

FS-20V W FFP2 R D

Certificate

UE/231/2019/1437

Date of issue

18/10/2019

Standard

EN 149:2001 + A1:2009

Protection class

Class P2




Certification body:

CIOP-PIB 1437
Central Institute for Labour
Protection – National
Research Institute

Supervising body:

CIOP-PIB 1437*
Central Institute for Labour
Protection – National
Research Institute

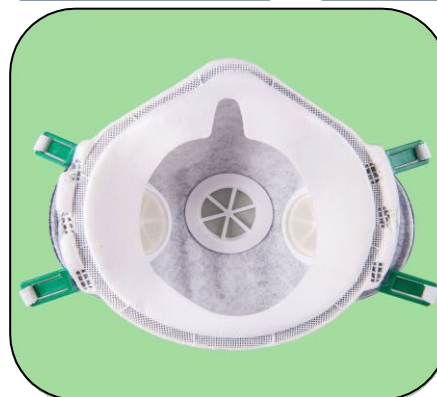

Thanks to the innovative design of the SIMPLA half masks, the nosepiece is no longer necessary. You no longer have to waste time trying to adjust the nosepiece to fit your face and your glasses will not fog up. SIMPLA half masks do not contain any metal elements.

The exhalation valve makes breathing resistance very low.

FS-20V W FFP2 R D is a low-resistance reusable filtering half mask with 4-point head band adjustment. The half mask is equipped with an activated charcoal nonwoven layer that effectively captures chemical substances in the air below the TLV value.

The half mask is equipped with two additional filters that enhance the filtering area and provide fresher and cooler air under the facepiece.

The half mask seal allows you to keep the product clean if used for several days.

Intended use

For protecting the user's respiratory tract against the harmful impact of air pollution in the form of solid and/or liquid particles forming aerosol (dust, fumes, mists) up to $10 \times$ TLV.

Application

Medium-toxic particulate matter, dusts of asbestos, copper, barium, titanium, vanadium, chromium, manganese, wood dusts, coal dust containing more than 10% of free silica, mining industry, chemical industry, metallurgical industry.

Specification




Half mask face-piece and filters:

- Needle-punched nonwoven polyester
- Melt-blown nonwoven polypropylene
- Activated charcoal nonwoven
- Protective nonwoven

Additional elements:

- Exhalation valve
- Two filters reducing airflow resistance
- Two check valves in the filters
- Polyethylene foam seal within the half mask facepiece
- Four-point headband adjustment
- Head bands

The improved, preshaped nosepiece and the seal guarantee outstandingly effective facial fit that increases the safety and comfort of use.

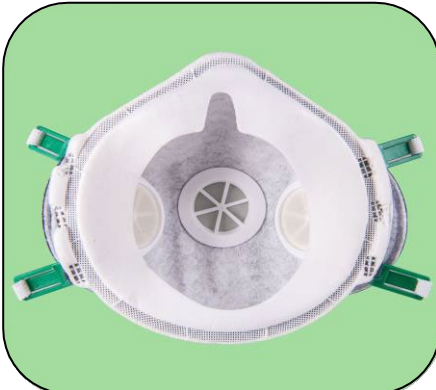Filtering half mask			
<h1>FS-20V W FFP2 R D</h1>			
Certificate UE/231/2019/1437	Date of issue 18/10/2019	Standard EN 149:2001 + A1:2009	Protection class Class P2 
Certification body: CIOP-PIB 1437 Central Institute for Labour Protection – National Research Institute		 	
Supervising body: CIOP-PIB 1437* Central Institute for Labour Protection – National Research Institute			

Requirements

The half mask meets the latest requirements:

Regulation (EU) 2016/425 of the European Parliament and of the Council of 9 March 2016 on personal protective equipment and repealing Council Directive 89/686/EEC.

Contraindications

The half mask must not be used under low-oxygen conditions (below 17%), which means that it is forbidden to use it in confined spaces, such as canals, manhole shafts, tanks. Also, the half mask does not protect against vapours and gases that are harmful for health and pose a life hazard. Do not use while extinguishing fire. The half mask does not supply oxygen. The half mask will not provide adequate facial fit for people with unshaved or bearded face. The half mask does not protect against aerosols containing radioactive particles, viruses or enzymes.

Primary packaging: 3 pcs per box

Collective packaging: 108 pcs per carton

*This number is on the product after the CE mark