



For protecting the user's respiratory tract against the harmful impact of air pollution in the form of solid and/or liquid particles forming aerosol (dust, fumes, mists) up to  $30 \times TLV$ .

## Application

High concentration of respirable dusts; use when welding or soldering; the half mask protects against dusts containing beryllium, antimony, arsenic, cadmium, cobalt, nickel, radium, strychnine, and radioactive particles.

# Specification

Half mask face-piece:


- Protective non-woven fabric
- Electret needled non-woven fabric
- Non-woven polypropylene melt blown fabric
- Protective non-woven fabric

#### Additional elements:

- Exhalation valve
- Nosepiece for better facial fit within the nose area
- Polyethylene foam nose seal
- Head band pins for length adjustment
- Head band

Compact, face-fitting shape, pleasant-to-touch and delicate material. The half mask is covered with a special protective nonwoven layer, which prolongs its life. With the valve placed at the side of the half mask, it can be folded and put into a pocket without damaging it.



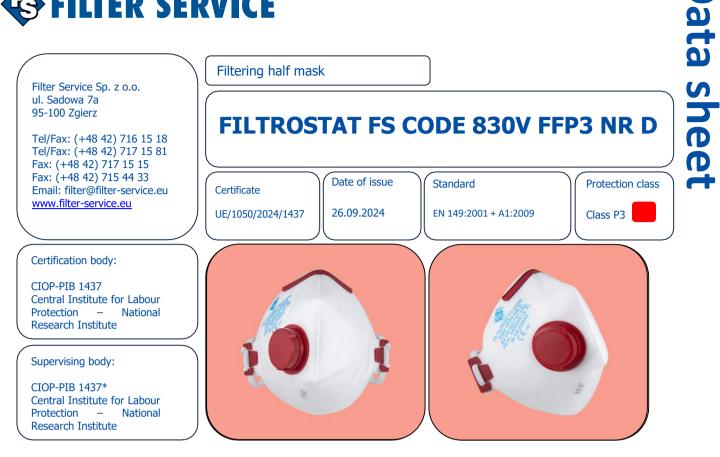

### **Requirements**

The half mask meets the latest requirements:

Regulation (EU) 2016/425 of the European Parliament and of the Council of 9 March 2016 on personal protective equipment and repealing Council Directive 89/686/EEC.

### **Contraindications**

The half mask must not be used under low-oxygen conditions (below 17%), which means that it is forbidden to use it in confined spaces, such as canals, manhole shafts, tanks. Also, the half mask does not protect against vapours and gases that are harmful for health and pose a life hazard. Do not use while extinguishing fire. The half mask does not supply oxygen. The half mask will not provide adequate facial fit for people with unshaved or bearded face.

Primary packaging: 15 pcs per box Collective packaging: 360 pcs per carton